



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
 26.05.1999 Bulletin 1999/21

(51) Int. Cl.⁶: **G11B 20/00**, G11B 20/14,
 H03M 5/14, H04L 25/49

(21) Application number: 97118292.8

(22) Date of filing: 21.10.1997

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
 NL PT SE**

(71) Applicant:
Hewlett-Packard Company
 Palo Alto, California 94304 (US)

(72) Inventor: **Hogan, Josh**
 Los Altos, CA 94022 (US)

(74) Representative:
Schoppe, Fritz, Dipl.-Ing.
Schoppe & Zimmermann
Patentanwälte
Postfach 71 08 67
81458 München (DE)

(54) **Method of inhibiting copying of digital data**

(57) A method of inhibiting copying of digital data. In a first embodiment, a sequence of symbols is added to original data (100), the sequence of symbols selected to encode into channel bits (110) having a large accumulated digital sum variance. The sequence of symbols is then encoded by a special encoder (108) that generates special channel bits that don't have a large accumulated digital sum variance. The special channel bits may be unambiguously decoded, but the resulting decoded symbol sequence (128) will likely be reencoded into channel bits having a large accumulated digital sum variance. In a second embodiment, a single symbol in the sequence of symbols is replaced after error correction symbols (104) have been added. The sequence of symbols with one substituted symbol is encoded into channel bits that don't have a large accumulated digital sum

variance. The resulting channel bits may be unambiguously decoded but the resulting symbol sequence will be error corrected and the error corrected symbol sequence will likely be reencoded into channel bits having a large accumulated digital sum variance. In a third embodiment, additional decryption or descrambling information or other data modification information is encoded into the sign of the digital sum variance of each blocked row of data. The decoded additional information is used to decrypt, descramble or otherwise modify the primary information. In variations of the third embodiment, decryption information is encoded into patterns of run lengths or in merge bits. In general, the embodiments and alternatives are independent and can be combined in complex ways to make reencoding difficult.

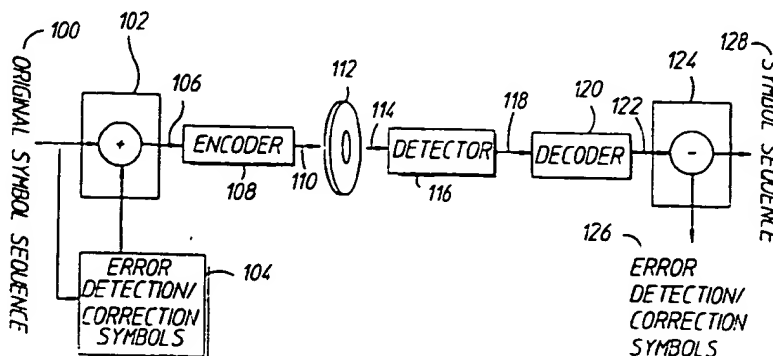


FIG 1

Description

FIELD OF INVENTION

[0001] This invention relates generally to transmission of digital data or recording of digital data in mass memory systems such as disks and tapes and more specifically to methods for preventing or inhibiting unauthorized copying.

BACKGROUND OF THE INVENTION

[0002] Digital information is often transmitted via network, microwave or satellite in a form that can be captured by anyone having the proper receiving equipment. Compact disks (CD's) and Digital Audio Tape (DAT) provide a single standard digital recording medium for data, software, images and audio. Proposed Multimedia Compact Disks, Digital Video Disks, Super Density Disks or other extensions of compact disk technology will provide higher capacity and bandwidth, enabling digital recording of video. For transmitted or recorded digital information, the ability to make an exact copy is often an essential attribute, enabling exchange, distribution and archiving of information. Sometimes, however, there is a need to prevent copying. For example, it is illegal to make an unauthorized copy of copyrighted material. Software, music and video providers have a need for distribution of copyrighted works in a digital form while preventing unauthorized copying of those works. There is a need for a method of selectively inhibiting copying of digital information. In the following application, the word "transmitting" is intended to include sending data to (and retrieving data from) a recording device. In general, recording will be used for illustration but the concepts apply equally well to other types of digital data transmission.

[0003] Digital data is rarely transmitted or recorded in its original digital form. Instead, high density digital transmission or recording typically involves numerous tradeoffs of various constraints, resulting in the original data being encoded into bit patterns that satisfy the various constraints. First, there is typically a tradeoff between recording density and error rate. A finite error rate imposes a requirement for additional information to be added for error detection and correction.

[0004] A second constraint deals with the highest permissible transition frequency. In magnetics, a related limitation is commonly called intersymbol interference. Typically, in the recording medium, each transition of state has some distorting effect on neighboring transitions. This distortion imposes a maximum on the number of consecutive transitions at a specified minimum spacing. Alternatively, in any recording medium, there is some maximum rate at which some physical phenomena can switch states.

[0005] A third typical constraint is self-clocking. For serial binary data, a clock signal for decoding the data

often must be extracted from the timing of the transitions of a read signal (reversal of voltage or current, change of frequency or phase, change of light intensity, etc.). There must be an adequate frequency of transitions to keep the clock signal synchronized.

[0006] Serial binary data is often physically in a format called NonReturn to Zero Inverted (NRZI). In NRZI format, the waveform is at one state until a binary one occurs, at which time the waveform switches to an opposite state. The maximum transition rate or intersymbol interference limitations discussed above impose a minimum on the amount of time that can pass between transitions. The requirement for self clocking imposes a maximum on the amount of time that can pass with no transition. A code that satisfies the maximum transition rate constraint, the self-clocking constraint, and the NRZI format requirements is commonly called a Runlength Limited (RLL) code. In a RLL code, the number of consecutive binary zeros in the encoded bit pattern must be at least as large as a specified non-zero minimum and no greater than a specified maximum. For example, compact disks typically use a code specified as (2,10)-RLL which means that the number of consecutive zeros in the encoded bit pattern must be at least 2 and no greater than 10.

[0007] A fourth typical constraint on the encoded binary signal is a requirement for a limit on the low frequency content of the read signal. In many read channel detectors, a transition is indicated when the read signal crosses a fixed threshold. Any low frequency content in the read signal can cause an offset, restricting the dynamic range of the detector. In addition, for writeable optical disks, track following and focusing signals may be implemented using low frequency modulation of the read signal. Any low frequency content in the read signal may interfere with track following and focusing. Referring again to NRZI format, assign the value +1 to one state of a signal and assign the value -1 to the opposite state. A sum of these values (or the area under the curve) is called Digital Sum Variance (DSV) or alternatively Running Digital Sum (RDS). For many detectors, there is a specified maximum DSV or RDS, and any DSV exceeding the specified maximum is likely to cause data read errors or servo problems.

[0008] It is common to encode the original digital data into other digital data that satisfies the above constraints. Typically, the original data is divided into symbols, where a symbol is a small fixed number of bits, typically one byte (8 bits). Typically, each symbol is used as an index into a look-up table containing bit patterns (called channel bits) that satisfy the various constraints. For example, for compact disks, the current standard format divides the original data into 8-bit symbols, each 8-bit symbol being used as an index into a table of channel bit patterns, each channel bit pattern in the table having 14 bits. The corresponding encoder is commonly called an EFM encoder, for "eight-to-fourteen modulation." Each of the 14-bit patterns satisfies the (2,10)-

RLL constraint described above. However, when one 14-bit pattern is concatenated with another, the combination of the end of one pattern and the beginning of another pattern may cause a violation of the (2,10)-RLL constraint and some strings of concatenated patterns may violate a DSV constraint. An additional 3 bits, called merge bits, are inserted between the 14-bit table patterns to merge the end of one pattern to the beginning of the next pattern. With appropriately selected merge bits, the resulting channel bits satisfy the (2,10)-RLL requirement and satisfy the DSV requirement. The net result is that for every 8 bits of un-encoded data, 17 bits are recorded (not fourteen as suggested by the name EFM).

[0009] For multimedia recording, an improvement to EFM encoding has been proposed, called EFMPlus. In EFMPlus, the encoder is a state machine. For each state of the state machine, there is a separate look-up table. In general, for each symbol, the corresponding channel bit pattern varies depending on the state. Note, however, that the channel bit pattern may be the same for at least two states. In addition, each table entry also specifies the next state. EFMPlus eliminates the merge bits, and instead uses slightly longer table entries and sophisticated substitution of alternative channel bit patterns. The encoder typically looks ahead to oncoming symbols and their possible alternative patterns, choosing the most appropriate pattern for both RLL and DSV. The net result of the EFMPlus proposal is that for every 8 bits of unencoded data, 16 bits are recorded, for a density improvement of about 6% relative to EFM. In the proposed standard for EFMPlus encoding, the look-up table entries are standard to enable unambiguous decoding. However, the encoder algorithms for deciding which alternative bit pattern and corresponding next state will typically vary from manufacturer to manufacturer. Therefore, different manufacturers may encode identical symbol sets into different binary channel bit sequences for recording, but all such sequences can be unambiguously decoded. For additional general information on Multimedia Compact Disks and EFMPlus, see for example, K.A.S. Immink, "EFMPlus: THE CODING FORMAT OF THE MULTIMEDIA COMPACT DISC," *IEEE Transactions on Consumer Electronics*, Vol. 41, No. 3, pp 491-497, August 1995.

[0010] Neither EFM or EFMPlus can completely guarantee satisfaction of the DSV constraint. In each encoding method, there are possible sequences of channel bits that can result in a large accumulated DSV. In EFMPlus, the encoder system designer can reduce the probability of a large accumulated DSV to some commercially acceptable probability but cannot reduce the probability to zero. Even though all permissible sequences of channel bits can be unambiguously decoded from a digital point of view, there are potential analog dynamic range problems in the read channel that may prevent proper decoding or that may interfere with tracking in writeable versions. There are opportuni-

ties to exploit this attribute to inhibit copying.

[0011] There are additional formatting details for proposed multimedia recording standards that create additional opportunities for copy protection. In proposed Digital Video Disk standards, original digital information is divided into blocks, each block including row and column error correction. There are opportunities to exploit various properties of block formatting to inhibit copying.

10 SUMMARY OF THE INVENTION

[0012] There are three embodiments. The first two embodiments exploit the fact that some sequences of symbols will likely be encoded by "standard" encoders into a sequence of channel bits that leads to a large accumulated DSV, and likely cannot be reliably detected by most read channels.

[0013] In a first embodiment, a special encoder encodes an original sequence of symbols into a sequence of channel bits that can be read by all decoders. Standard encoders will likely encode the same original sequence of symbols into a different sequence of channel bits that will lead to a large accumulated DSV. Therefore, the special channel bits can be unambiguously decoded but subsequent reencoding likely results in unreadable channel bits. The special encoder makes one or more non-optimal (over the short term) choices of channel bits, placing the encoder into a state that prevents a long term propagation of states leading to a large accumulated DSV. An override switch may be employed to force the non-optimal choice.

[0014] In a second embodiment, one or more deliberate errors are introduced into the sequence of symbols after error correction symbols have been added. The resulting sequence of symbols with errors encodes to a sequence of channel bits that can be read by all decoders. However, the error-corrected symbol set likely encodes to a sequence of channel bits that result in a large accumulated DSV.

[0015] The third embodiment exploits an attribute of the data blocking format. A special encoder encodes additional information without adding overhead data. In a specific example, DSV is computed for each individual half-line of blocked data (where a half-line is 91 bytes including error correction and sync symbols) and information is encoded into the sign of the DSV values of blocked half-lines. In an alternative implementation, information is encoded into run length distribution. In either alternative, the encoding may be accomplished by choice of channel bits or by introduction of deliberate errors. The additional coded information is extracted by the decoder and passed on to a processor or higher level decoder for use in decrypting or de-scrambling the decoded symbols. Standard encoders will not generate the same pattern for the sign of the DSV of half-lines or the same run-length patterns when encoding the same original encrypted or scrambled symbols.

[0016] For each of the embodiments, the original data

can be accurately recovered, but other encoders will likely encode the same original data into channel bits that cannot be recovered, or other encoders will encode the same original data into channel bits that don't include key decryption or descrambling information. The three embodiments are independent and any two or all three can be combined. The first two embodiments do not require any changes to proposed standards but each requires adding some additional overhead data. The third embodiment requires no additional overhead data, but requires decoders to have the ability to extract the additional information and pass the additional information on to a processor or higher level decoder.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

Figure 1 is a block diagram of a digital recording system including the method of the invention.

Figure 2 is a table illustrating look-up tables of encoding patterns for a multiple state encoder.

Figure 3A is a graph of Digital Sum Value (DSV) resulting from a particular symbol sequence and a standard encoder.

Figure 3B is a continuation of figure 3A.

Figure 3C is a graph of Digital Sum Value (DSV) for the same symbol sequence as in figure 3A but with a special encoder.

Figure 3D is a continuation of figure 3C.

Figure 4 is a block diagram of data formatted into a block, in accordance with proposed standards.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT OF THE INVENTION

[0018] Figure 1 illustrates a digital recording system. The original data is divided in a sequence of symbols (100). In module 102, the data is blocked, additional symbols 104 are added for error detection and correction, and header and synchronization data are added. The modified sequence of symbols 106 is encoded by encoder 108 into a sequence of channel bits 110. The channel bits 110 are written onto a recording medium, depicted in figure 1 as a disk 112. A read signal 114 from the disk 112 is converted from an analog signal to a binary sequence 118 by detector 116. The binary sequence 118 is decoded by a decoder 120 into a symbol sequence 122. Error detection and correction, if appropriate, are performed in module 124 and the error detection and correction symbols 126 are stripped out along with other overhead data. The resulting final sym-

bol sequence 128 ideally is identical to the original symbol sequence 100.

[0019] In a first embodiment of the invention, a special encoder 108 makes a non-optimal channel bit decision for short term DSV that results in a sequence of channel bits 110 that is different than the sequence of channel bits that most other encoders will generate from the same original data 100. The special sequence of channel bits does not lead to a large accumulated DSV. The sequence of channel bits from other encoders likely leads to large accumulated DSV. It is unlikely that other encoders will make the same non-optimal choice for short term DSV.

[0020] In a second embodiment of the invention, deliberate errors are introduced into the symbol stream 106, after error correction symbols 104 have been added. The resulting decoded and error-corrected symbol sequence 128 is identical to the original symbol sequence. However, a different encoding system will not generate the same sequence of channel bits 110 unless it also introduces the same deliberate errors. Without the deliberate errors, the resulting sequence of channel bits leads to large accumulated DSV.

[0021] In a third embodiment of the invention, additional information is encoded by encoder 108 and decoded by decoder 124. The additional information is used for decryption, descrambling, or other data modification.

[0022] Figure 2 illustrates look-up encoding tables for a multiple state encoder, as proposed in the EFMPlus proposal. In figure 2 there is a main look-up table 200 and a substitute table 214. The main look-up table 200 has code entries for 256 symbols (reference number 202) in four columns (reference numbers 204, 206, 208 and 210) corresponding to four possible states of a state machine. The number to the right of each code (for example, reference number 212) indicates the next state. For example, if the state machine is in state 1 (reference 204) encoding symbol 80, the state machine will then switch to state 3. In general, a particular channel bit pattern may be entered for multiple symbols, but at different states, thereby requiring a state dependent decoder. For symbols other than the first 88, there are typically two alternatives for the corresponding channel bits so that two of the four states result in one alternative and the other two states result in the other alternative. The substitute table 214 is available only for the first 88 symbols. For the first 88 symbols, the encoder can decide to use the code (and next state designation) from either the primary table 200 or the substitute table 214. For the first 88 symbols, the DSV of each sequence of channel bits in the main table is negative and the DSV of each sequence of channel bits in the substitute table are predominately positive. Only the first 88 rows provide a choice of channel bits at each state. Therefore, only the first 88 rows provide full DSV control, thereby providing the opportunity for the first embodiment of the invention.

[0023] Figures 3A and 3B illustrate a symbol sequence: 80, 132, 220, 154, . . . , repeating 220, 154 (reference 300). In figures 3A and 3B, a standard encoder in state 1 (reference 302) of the substitute table encodes symbol 80 to channel bits 0000100100100100 (reference 304) where the bits are written from left to right. An NRZI waveform 306 starts in a +1 state and stays at that state until the first binary one in the channel bits (starting from the left) at which time it switches states to -1. After 2 binary zeros in the channel bits, the NRZI waveform switches states again back to +1. DSV as plotted in figures 3A-3D is the running sum of the NRZI waveform 306.

[0024] Figures 3C and 3D illustrate the same symbol sequence as figures 3A and 3B but encoded by a special encoder. The special encoder starts in state 1 in the primary table (figure 2, reference 200). Encoders are expected to look ahead a few symbols (for example 2-3 symbols), examining all possible alternatives to determine the best choices for minimizing DSV. Compare the DSV waveforms for figures 3A and 3C at the end of the third symbol (symbol 220). Also compare the DSV waveforms for figures 3B and 3D at the end of the fourth symbol (symbol 154). In each case, the magnitude of DSV is smaller for the standard encoder (figures 3A and 3B). For an encoder looking ahead two or three symbols to decide on which alternative channel bits to use, and given the two alternatives illustrated in figures 3A-3D, the selection illustrated in figures 3A and 3B is the optimal selection. In fact, however, the symbol sequence 80, 132, 220 has been contrived to bias or "trick" the encoder state machine into choosing a path that leads to state 2 for symbol 220. The alternative path from symbol 80 leads to state 3 for symbol 220. Symbol 132 biases the encoder to choose a desired path. If necessary, longer sequences could be used to ensure a particular state for a particular symbol, such as state 2 for symbol 220. Then, a repeating series of symbol 154 in state 3 followed by symbol 220 in state 2 back to symbol 154 in state 3 and so forth results in a repeating pattern where there are more zeros when the NRZI signal is in the -1 state than there are when the NRZI signal is in the +1 state and DSV accumulates in a negative direction indefinitely, as illustrated in figure 3B.

[0025] The key difference between the standard encoder of figures 3A and 3B and the special encoder of figure 3C and 3D is that the special encoder makes an apparently less optimal choice for the first three symbols, entering the repeating sequence of symbol pairs (symbols 220, 154) from state 3 instead of state 2. The repeating codes for the resulting repeating states results in a DSV that does not accumulate, as illustrated in figure 3D. It is important to note that a single choice for the channel bits and corresponding state (for example, for symbol 80 in figure 3A) can lead to propagation of an accumulating DSV by not allowing a way out of a particular state sequence. Alternatively, a single non-optimal choice for the channel bits and corresponding

state can prevent propagation of a long undesirable sequence of states. The special encoder could be provided with a switch to force the non-optimal choice at the appropriate time.

[0026] A contrived sequence sufficiently long enough to ensure a large accumulated DSV necessarily substantially increases the overhead for a block of data. Therefore, the use should be limited. For copy protection of software, it is sufficient to have only a few blocks with the extra overhead sequences, but preferably with key software or data in these "protected" blocks. For video, individual "protected" blocks preferably occur once every 15 to 20 seconds. Because of the additional data overhead, any higher frequency of protected blocks might interfere with image quality. However, if the frequency is too low, protected blocks might complicate special features such as reverse play. For example, if information in each protected block is required for descrambling of subsequent video frames, reverse play would always have to reverse to a previous protected block to enable play of frames after that protected block.

[0027] The second embodiment is a variation of the first embodiment, also exploiting symbol sequences that lead to DSV violations. For example, consider again the symbol sequence in figures 3A-3D (80, 132, 220, 154, 220, 154 . . .) and refer back to figure 1. When module 102 blocks the symbols, the symbol sequence of figures 3A-3D may be added to a block. Then, encoder 108 can be externally directed, for example by a processor, to substitute some other symbol for symbol 132. This substitute symbol is carefully chosen to bias the encoder 108 to choose state 3 for symbol 220, as in figure 3B. When the resulting channel bits are decoded, module 124 will detect the symbol error and correct the substitute symbol back to symbol 132. Then, any further encoding by standard encoders will be as in figure 3A, leading to a large accumulated DSV.

[0028] Figure 4 illustrates one proposed format for blocking data. In figure 4, block 400 has 192 rows of data bytes. Each row has a series of synchronization bytes (402, 404) followed by 91 data bytes (406) followed by additional synchronization bytes (408, 410) followed by 91 data bytes (412) followed by error correction bytes (414) for the row. In addition, each column of 192 bytes has error correction bytes (416, 418). In one proposed format, part of the overhead for every half-row of 91 data bytes is sync data that can also serve as DSV control. This data is labeled as "sync specific" (404, 410) in figure 4. Note that a sync byte could reverse the direction of accumulation or force the state into a state sequence that leads to something other than state 2 for symbol 220. Therefore, for this proposed format, a sequence of accumulating DSV as discussed above may be interrupted every 91 bytes. The method described for the first embodiment can simply be restarted every 91 bytes. For deliberate errors however, if an error is introduced repeatedly in the same column for every row, the errors will overwhelm the column error

correction capability and cannot be corrected. However, if multiple deliberate errors are placed along a diagonal (420), as illustrated in figure 4, there is only one deliberate error per row and only one deliberate error per column. Each deliberate error is then correctable by the row and column error correction codes. In a third embodiment, a special encoder encodes additional information that can be used for decryption or descrambling.

[0029] Referring to figure 4 again, each half-row has 91 symbols. It is possible to encode data into the DSV for each half-row of 91 symbols without causing any accumulated DSV and without impacting the overhead. For example, given a view of all 91 symbols for a half-row, channel bit selections can be made to ensure that the DSV for each half-row is either negative or positive. Alternatively, a deliberate error may be introduced on each half-row to ensure that the DSV for each half-row is either negative or positive. Alternatively, the DSV may be made to have a signed numerical value within a specified range. As a specific example, a single bit of information per row can be encoded as follows. Let the single bit be a logical one if the first half-row DSV is positive and the second half-row DSV is negative. Let the single bit be a logical zero otherwise. This encoding of the sign of the DSV by row provides 192 bits or 24 bytes per block. This additional data can be extracted by the decoder and provided to a processor or higher level decoder for use in decrypting, descrambling or otherwise modifying the original data. Decoding the special additional data is relatively simple (computing DSV for each half-row). Determining the proper sequences of channel bits, for example for the amount of data in a video, might require extensive off-line computation by a powerful computer. Therefore, it is highly unlikely that a standard encoder would produce the same special encoding.

[0030] As an alternative to encoding data in the DSV of half-rows, data may be encoded into the lengths of runs of binary zeros. By viewing an entire half-row, channel bit alternative decisions can be made to bias the runs of binary zeros without adding to data overhead or causing DSV problems. Alternatively, deliberate errors can be introduced to impact the runs of binary zeros. As an example, a single bit could be a logical one if there are more than X runs of Y or more zeros in the first half-row and there are less than X runs of Y or more zeros in the second half-row. Still another alternative is to simply count the number of transitions or ones in a line. Encoding could be based on whether the number is even or odd, or whether the number exceeds some threshold number. It is preferable to use a method that is immune to a small number of bit errors, for example, a threshold with some margin.

[0031] A version of encoding additional data can be implemented on present compact disks, using the three merge bits. Given a large number of data sequences, an encoder will have a choice of which merge bits to use

and the encoder can use this choice to encode an encryption key. It can do this without diminishing DSV control. Decoders must have the additional ability to extract the information from the merge bits. One example implementation is as follows. If merge bits 100 or 001 have been used and either set of bits is equally valid, then neither will violate the (2,10) constraint. The encoder can, for example, use 100 to encode a binary zero and use 001 to encode a binary one (but only where either set of bits is equally valid). In this way, bits of information can be encoded, preferably with some parity bits, on a sequence of merge bits. This may require offline analysis to find a data sequence that allows flexibility in selecting the merge bits. The decoder may have to be directed to start at a specific address.

[0032] Note that video on a DVD for broad distribution may be compressed using a variable bit rate compression algorithm such as MPEG 2. It is unlikely that a DVD player with record capability will have the capability to recompress a copy using the same high quality compression technique. That is, a copy of a decompressed video will likely be of lower quality than the original. However, if compression occurs before encryption or scrambling, it may be possible to decrypt or descramble without decompressing, and then make a copy of the decrypted compressed data. Therefore, for copy protection, it is preferable to encrypt or scramble video data before compression and require a player to decrypt or descramble after decompression. However, the compression algorithms for video data depend on spatial and temporal correlation and encryption or scrambling of uncompressed digital data may interfere with compression. MPEG compression typically starts groups of frames with an intracoded frame (called an I-frame) which does not depend on information from previous frames. Successive frames after the I-frame are encoded as differences from other frames, using motion vectors. An I-frame and its following difference frames is typically called a group of pictures (GOP). A solution to scrambling before compression is to manipulate video data on the same GOP basis that the MPEG compression uses. One simple strategy is to randomly invert, horizontally or vertically, an I-frame image and all other images in the same GOP. Inversion of an entire GOP does not interfere with compression, but can render the video unwatchable.

[0033] Video scrambling and decoding can be implemented without requiring changes to standard readers. Proposed standards for video DVD include information at a specific address containing instructions to the reader's controller on how to read the video from the disk. If random inversion is employed for scrambling, the instruction block can include information on how to decode the inversion information and how to use the decoded information to undo the random inversions. That is, the instruction block can provide the information on how to decode information previously encoded using encoding methods as described above in the third

embodiment. The instruction block may then be made a "problem" block as described above in the first two embodiments of the invention, substantially complicating copying of the video, without requiring changes to proposed standards.

[0034] Note that encoding data into the sign or magnitude of the DSV and encoding data into run lengths can be combined. Finally, note that these are just examples of encoding information in ways that do not add overhead information. When alternative channel bit patterns are permitted, there are many alternative ways of encoding information in patterns of bits. For example, the state of the state machine provides an additional variable and the sync specific bytes provide an additional variable (if implemented). Note that all the alternatives discussed may be combined in complex combinations of DSV, sign and magnitude of DSV, run length and others. The overall goal is provide encoding that is easy to decode but is difficult to reverse engineer and difficult to reencode.

[0035] The foregoing description of the present invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed, and other modifications and variations may be possible in light of the above teachings. The embodiment was chosen and described in order to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best utilize the invention in various embodiments and various modifications as are suited to the particular use contemplated. It is intended that the appended claims be construed to include other alternative embodiments of the invention except insofar as limited by the prior art.

Claims


1. A method of transmitting decryption data, the method comprising the following steps:


- (a) encoding a bit of decryption data into a pattern of merge bits;
- (b) encoding channel bits (110) having the pattern of merge bits of step (a); and
- (c) transmitting the channel bits resulting from step (b).

2. The method of claim 1, further comprising using the decryption data for inhibiting copying of digital information, the method comprising the following additional steps:

- (d) decoding the channel bits from step (c);
- (e) decoding the pattern of merge bits in the channel bits of step (d) back into the bit of step (a); and
- (f) using the decoded bit of step (e) to modify the decoded channel bits of step (d).

EXAMINER DATE	INVENTOR NAME	CLASS	SUBCLASS	FILING DATE OF APPLICATION
5,699,434	DE 10,1987 HOGAN, JOSH	380	49	FE 26, 1996

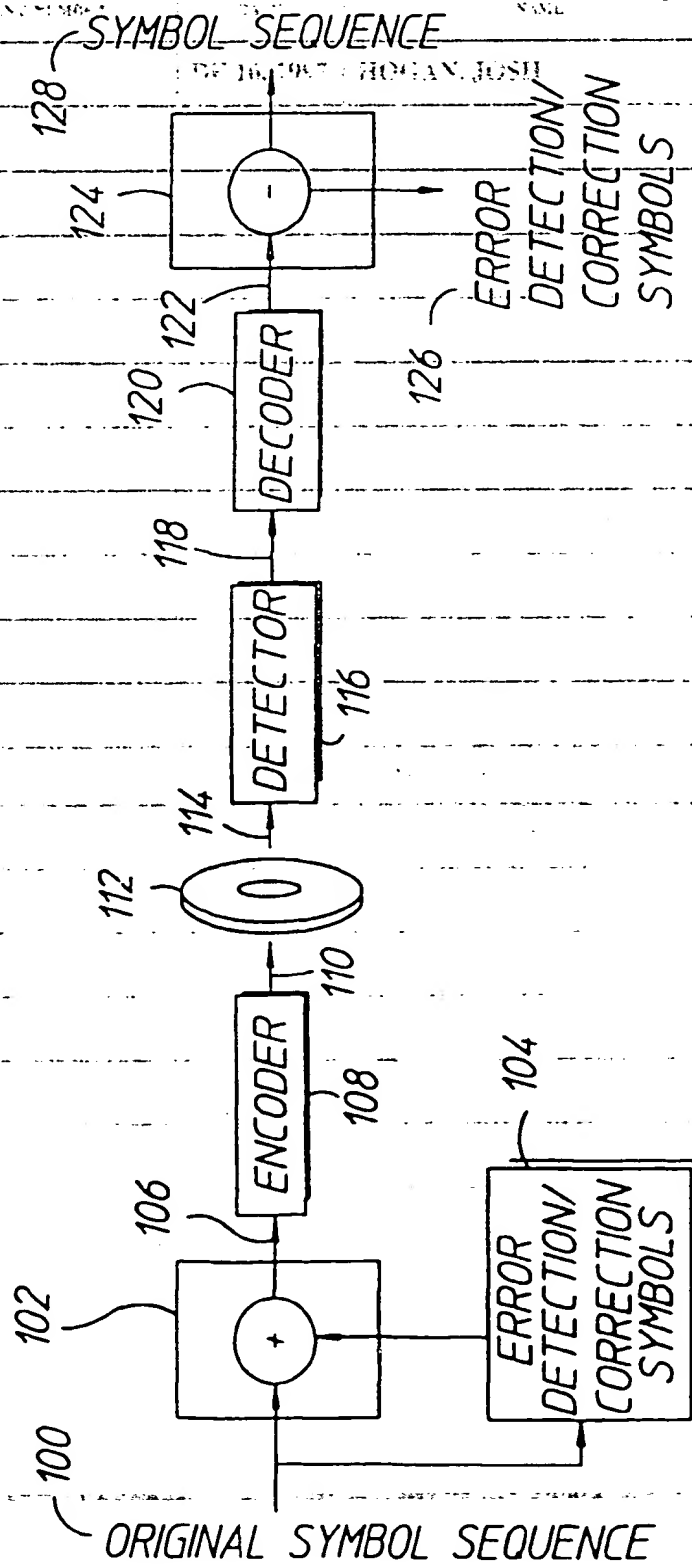



EP 0 918 326 A1

G11B 20/00 G11B 20/10
H03M 5/14 H04L 25/49

W. H. Heger, GmbH
D-80331 München, FRG

W. H. Heger, GmbH
D-80331 München, FRG

W. H. Heger, GmbH
D-80331 München, FRG

Europäisches Patentamt

European Patent Office

Office européen des brevets

EUROPEAN PATENT APPLICATION

STATE 1	STATE 2	STATE 3	STATE 4
CODE 4	CODE 4	CODE 4	CODE 4
CODE 2	CODE 2	CODE 2	CODE 2

214

SYMBOL	STATE 1	STATE 2	STATE 3	STATE 4
1	CODE 1	CODE 2	CODE 1	CODE 2
2				
3				
80	CODE 3	CODE 3	CODE 3	CODE 3
88				
132	CODE 2	CODE 2	CODE 3	CODE 3
154	CODE 3	CODE 3	CODE 2	CODE 2
220	CODE 3	CODE 3	CODE 2	CODE 2
256				

FIG 2

200

212

Description

FIELD OF INVENTION

[0001] The invention relates generally to transmission of data over a radio link or to storage in a mass memory system such as a hard disk and more specifically to the encoding of data for error correction.

BACKGROUND OF THE INVENTION

[0002] In the prior art, several different codes have been used for error correction. These codes are generally of two types: block codes and convolutional codes. Block codes are codes in which the data is divided into blocks and each block is encoded independently of the others. Convolutional codes are codes in which the data is encoded in a continuous stream and the encoding is done on a bit-by-bit basis.

[0003] One of the most common block codes is the Reed-Solomon code. This code is a type of cyclic code and is used in many applications, including digital video and audio. Another common block code is the BCH code. This code is also a cyclic code and is used in many applications, including digital video and audio.

[0004] One of the most common convolutional codes is the Viterbi code. This code is a type of trellis code and is used in many applications, including digital video and audio. Another common convolutional code is the Turbo code. This code is a type of iterative code and is used in many applications, including digital video and audio.

[0005] The invention provides a new method for encoding data for error correction. This method is based on a new type of code called a "Zero Inverted NRZI" code. This code is a type of convolutional code and is used in many applications, including digital video and audio.

[0006] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0007] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

other noise extracted from the timing of the transitions of a signal, such as a voltage or current, change of frequency or phase, change of light intensity, etc. There must be an adequate frequency of transitions to keep the clock signal synchronized.

[0008] Certain other states often physically form a signal called Non-Return to Zero Inverted (NRZI). In NRZI, the signal remains at one state until a transition occurs. The signal is then inverted to the opposite state. This is a type of binary code that is used for error correction.

[0009] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0010] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0011] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0012] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0013] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0014] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

[0015] The Zero Inverted NRZI code is a type of convolutional code that is used to encode data for error correction. This code is based on the NRZI code, which is a type of binary code. The Zero Inverted NRZI code is a modification of the NRZI code that allows for better error correction.

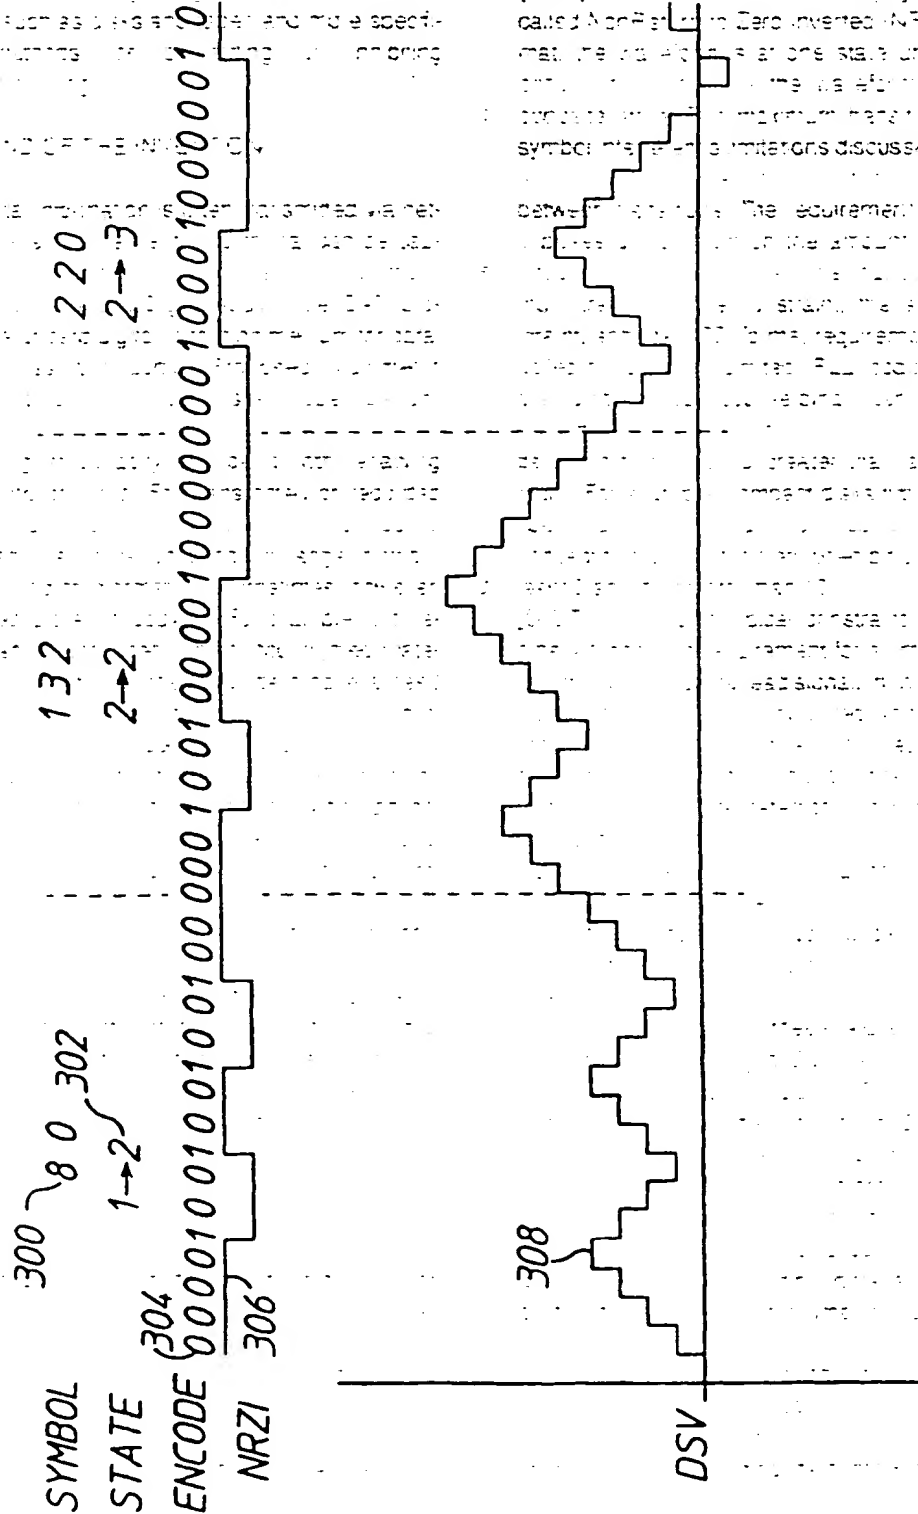


FIG 3A

Full correlation is observed above. However, when one 14-bit pattern is concatenated with another, the correlation of the end of one pattern and the beginning of the other pattern may not be as high as 1.0. Full correlation will be observed if concatenated patterns are: 1) data = 0000000000000000 & address = 0000000000000000 or 2) address = 0000000000000000 & data = 0000000000000000. The correlation will be observed between the 14-bit data patterns if the address of one pattern is the beginning of the data of another. With appropriately selected

154
3-2
01000

10000

[illegible]

220
2-3
1000001

000

0010

0000

0100

420000

15. 3-1010

000

7010

YMBO
TATE
CODE
NRZI

has to fix on this attribute to an oil copying

10011. There are additional formatting details for proposed multimedia recording standards that create addi-

The program is used for cost analysis, a computerized system for standards, and a digital performance evaluation system. Each block includes a row and column direction. There are opportunities to expand a block's features or box formatting to improve copying.

THE NEW YORK

[illegible][illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific information required.

2. The second step is to gather relevant data and information. This can be done through research, interviews, or other methods.

3. The third step is to analyze the data and information. This involves identifying patterns, trends, and relationships.

4. The fourth step is to synthesize the findings. This involves combining the information from the analysis to form a coherent picture.

5. The fifth step is to communicate the results. This involves presenting the findings in a clear and concise manner.

3B


G

FI

[illegible][illegible]

1. $\frac{1}{2}$

DSV

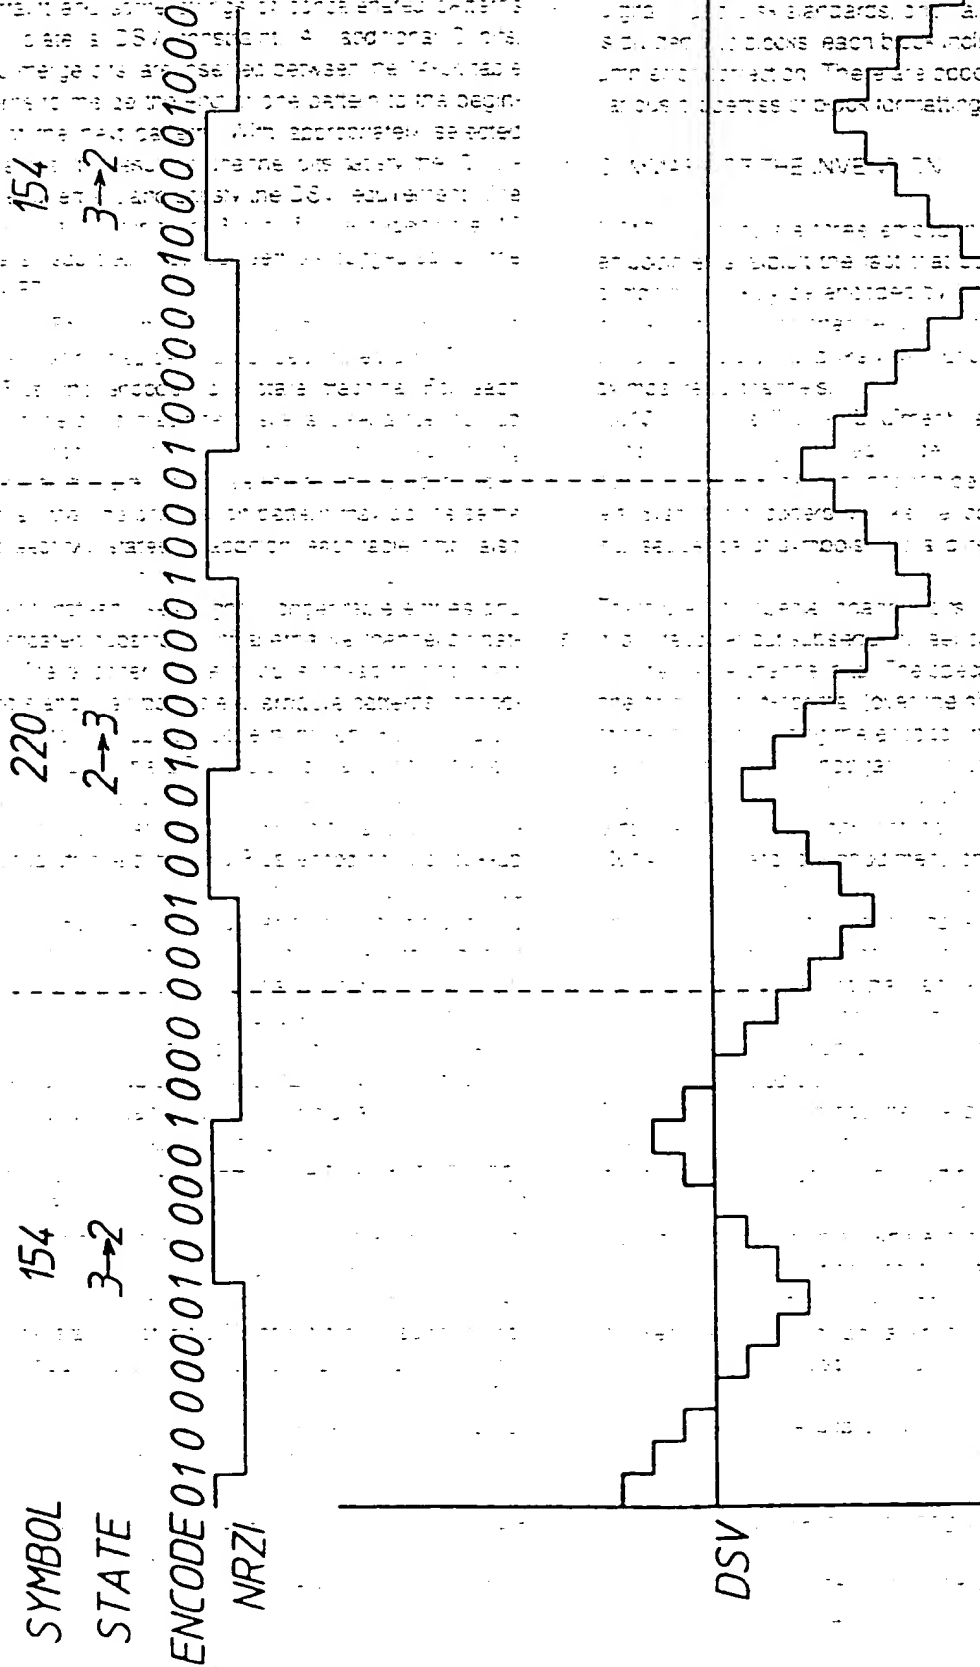

can be accidentally recovered, but other encoders will likely encode the same original data into channel bits that cannot be recovered, or other encoders will encode the same original data into channel bits that don't include any description of scrambling information. The three encodings are independent and any two or all three can be combined. The first two encodings do not require any changes to proposed standards but each require adding some additional overhead data. The third encoding requires no additional overhead data, but requires decoders to have the ability to extract the additional scrambling information from the additional overhead data.

0-1-1968

10017

01

01

2001

1300

0010

10

00

010

1000

0000

80 → 00

1000

0

00

7050

MEMORANDUM FOR THE RECORD

SY
ST
ENC

1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 26

the sequence $aa^{*}bb^{*}$ is identical to the original sequence $aa^{*}bb^{*}$.

[0019] In a first embodiment of the invention, a special sequence of bits is used to indicate the change of bits on the stream. For example, a special sequence of channel bits that is different from the sequence of channel bits that most other encoders will generate from the same original data. The special sequence of channel bits is used to indicate a large accumulated DSV. The sequence of channel bits from other encoders may lead to large accumulated DSV. It is unlikely that other encoders will generate the same special sequence.

[illegible]

"...the encoding of the error code
in the encoder's encoder '08' and
decoder '09'. The decoder will
be destroying either the root

b6
b7C

0

30

_____ G _____


13

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

[illegible][illegible]

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

DSI

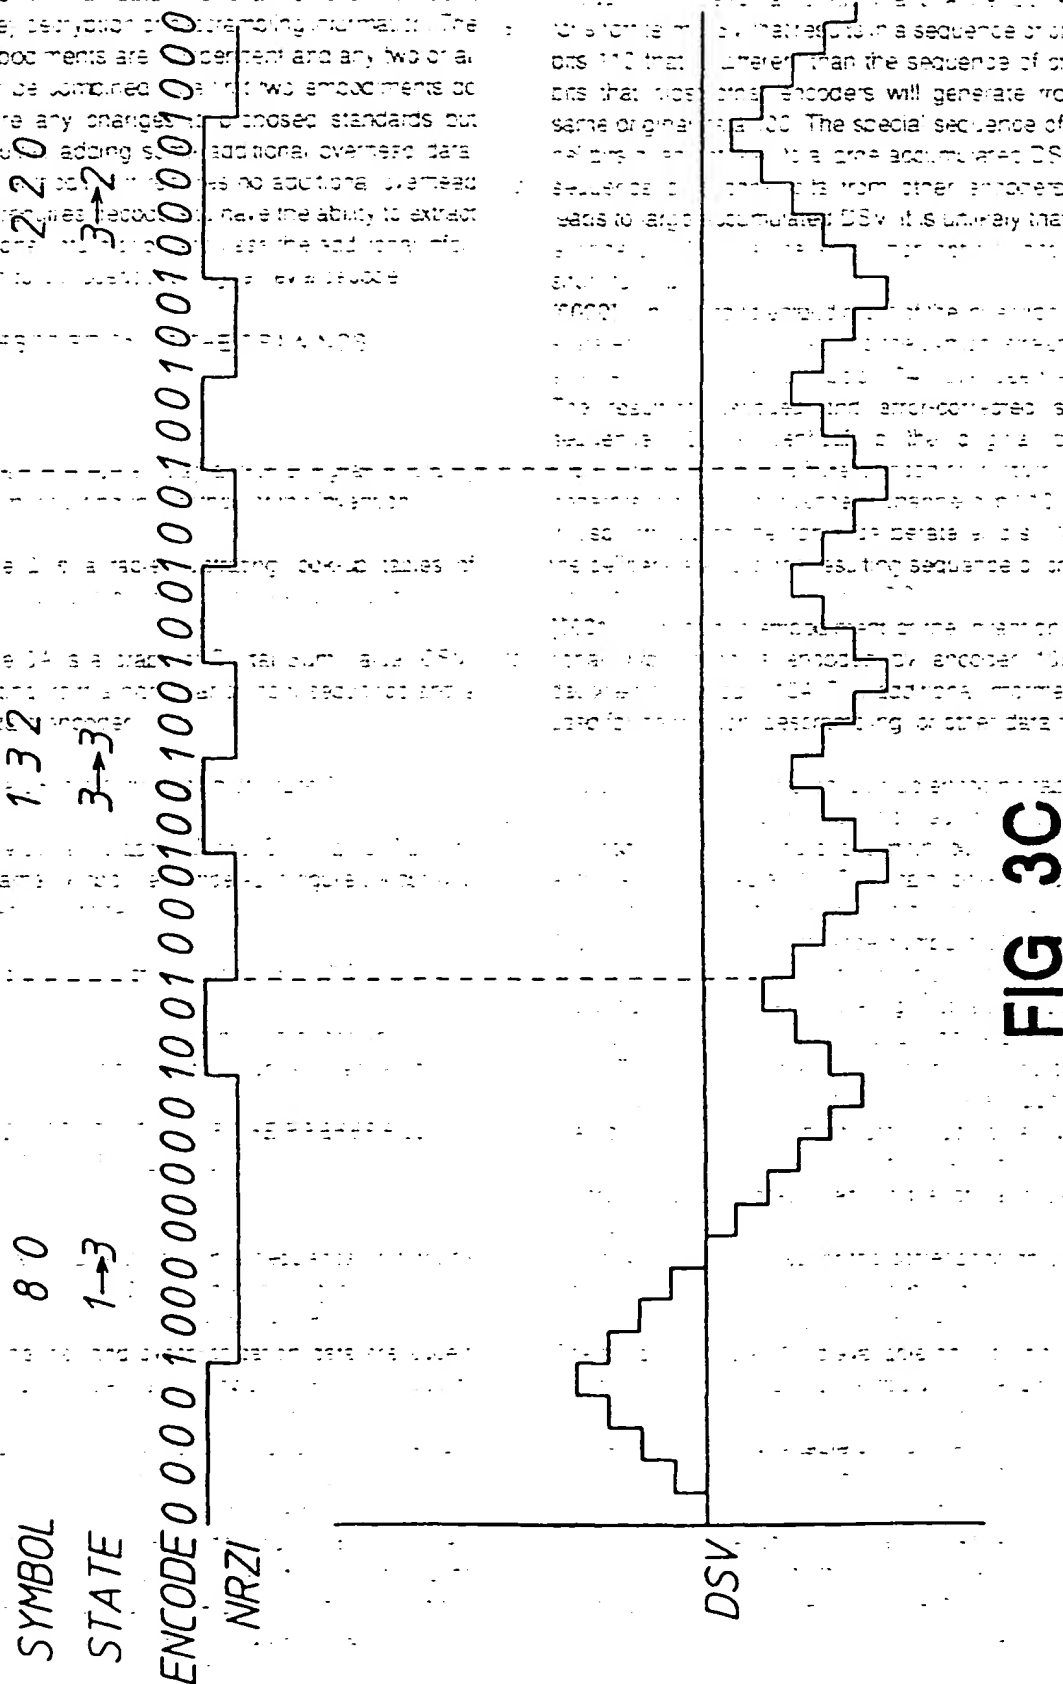

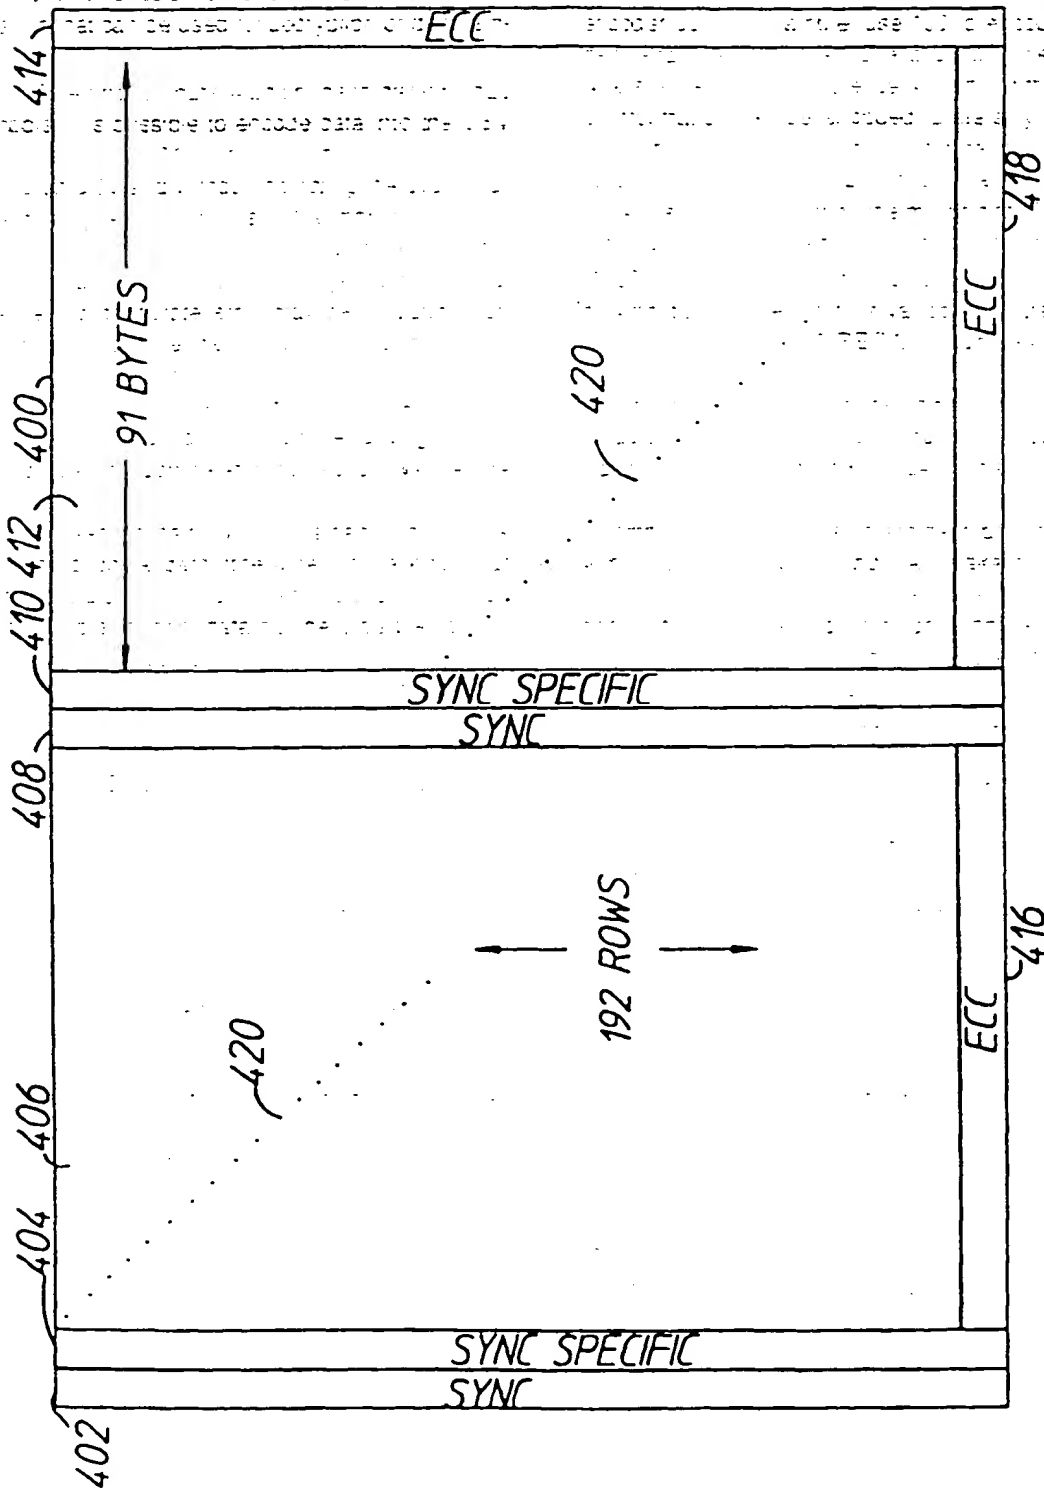


FIG 4

embodiment. The instruction block may then be made a "problem" block as described above in the first two embodiments of the invention, substantially complicating one of the steps without requiring changes to proper operation.

[0003] Note that encoding data into the sign or magnitude of the DSV and encoding data into run lengths can be combined.

[0004] Note that these are just examples of encoding.

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 97 11 8292

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (In I.C.I.6)
	EP 0 791 923 A (HEWLETT-PACKARD CO) 27 August 1997 * the whole document *	1,2	G11B20/00 G11B20/14 H03M5/14 H04L25/49
	EP 0 347 934 A (SONY CORP) 27 December 1989 * page 3, line 4 - line 20 * * page 3, line 55 - page 6, line 56 * * page 9, line 22 - page 10, line 33 * * figures 3, 10A-C *	1,2	
	A, DE 3 800 411 A (SCHOUHAMER-IMMINK K A) 27 December 1989 * precise form disclosed, and other modifications * IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, vol. 41, no. 3, August 1995, NEW YORK, pages 491-497, XP000539497; the * page 492, right-hand column, line 13 - page 493, left-hand column, line 29 *	1,2	
	A, JP 08 235 786 A (MATSUSHITA ELECTRIC IND CO LTD), 13 September 1996, * abstract *	1	TECHNICAL FIELDS SEARCHED (In I.C.I.6) G11B H03M H04L
	WO 96 32779 A (MATSUSHITA ELECTRIC IND CO LTD; TOKYO SHIBAURA ELECTRIC CO (JP)) 17 October 1996 * page 7, line 16 - page 10, line 8 * * page 16, line 25 - page 17, line 16 * * page 25, line 8 - page 27, line 24 * * figure 1 *	1	
	EP 0 594 413 A (SONY CORP) 27 April 1994 * column 9, line 12 - line 34 *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 March 1998	Examiner Schiwy-Rausch, G
CATEGORY OF CITED DOCUMENTS			
X particularly relevant if taken alone		T theory or principle underlying the invention	
Y particularly relevant if combined with another document of the same category		E earlier patent document, but published on, or after the filing date	
A technological background		D document cited in the application	
O non-written disclosure		L document cited for other reasons	
P intermediate document		& member of the same patent family, corresponding document	